

# 2000W修正波DC-AC逆变器

# MS/MSD2000系列

## ■ 特性:

- 1) 广泛用于汽车、船舶、太阳能/风能发电、移动办公、应急抢险、野外作业等;
- 2) 转换效率高、启动快;
- 3) 负载适应性与稳定性强;
- 4) 提供过流及短路保护, 避免电器损坏;
- 6) 提供低电压保护;
- 7) 提供过载保护;
- 8) 产品体积小、重量轻、环保无噪音、免维护、易于携带。




RoHS

型号 (MS/MSD)	MS2000U-121	MS2000U-122	MS2000U-241	MS2000U-242	MS2000U-481	MS2000U-482
输出功率	2000W					
瞬间峰值功率	4000W					
直流输入电压	110V	230V	110V	230V	110V	230V
交流输出电压	100-120VAC	220-240VAC	100-120VAC	220-240VAC	100-120VAC	220-240VAC
频率	50/60Hz ± 3Hz					
输出波型	修正波					
转换效率	>90%					
无负载损耗	≤0.9A					
直流输入电压范围	11-14.5VDC	11-14.5VDC	22-29VDC	22-29VDC	44-58VDC	44-58VDC
低电压关断点/红灯亮	11 ± 0.5VDC	11 ± 0.5VDC	22 ± 1VDC	22 ± 1VDC	44 ± 2VDC	44 ± 2VDC
低电压恢复点	9.5 ± 0.5VDC	9.5 ± 0.5VDC	19 ± 1VDC	19 ± 1VDC	38 ± 2VDC	38 ± 2VDC
高电压关断点/红灯亮	15 ± 0.5VDC	15 ± 0.5VDC	30 ± 1VDC	30 ± 1VDC	60 ± 2VDC	60 ± 2VDC
保护后恢复方式选择	手动 / 自动 (默认)					
USB输出	5V/2.1A				48V无USB设计	
数显显示	可选				48V无数显设计	
远程遥控	可选					
保护功能	过载、过压、欠压、短路、漏电、高温及反接等报警保护					
使用环境温度	-20℃~50℃					
风机控制方式	温控或带载					
产品尺寸 (cm)	33cm*23cm*10cm					
产品毛重量 (KG)	3960G					
电池连接端子	φ 10	φ 10	φ 10	φ 10	φ 10	φ 10


# 2000W正弦波DC-AC逆变器

# MS/MSD2000U系列

## 产品型号说明

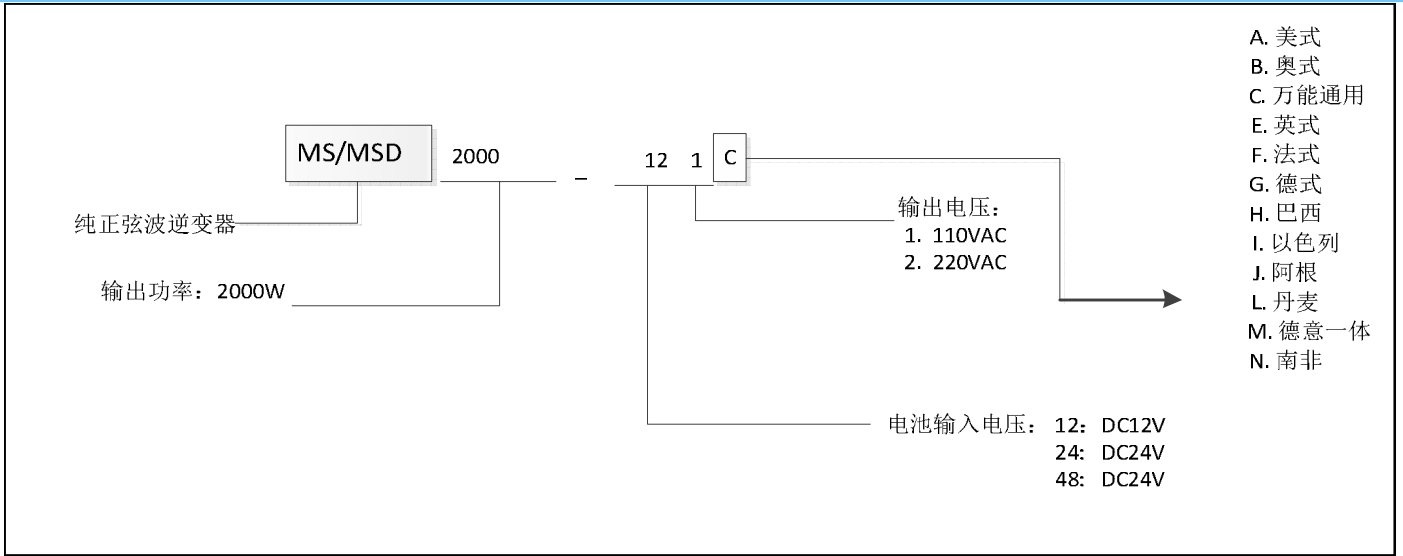

## 插座选型

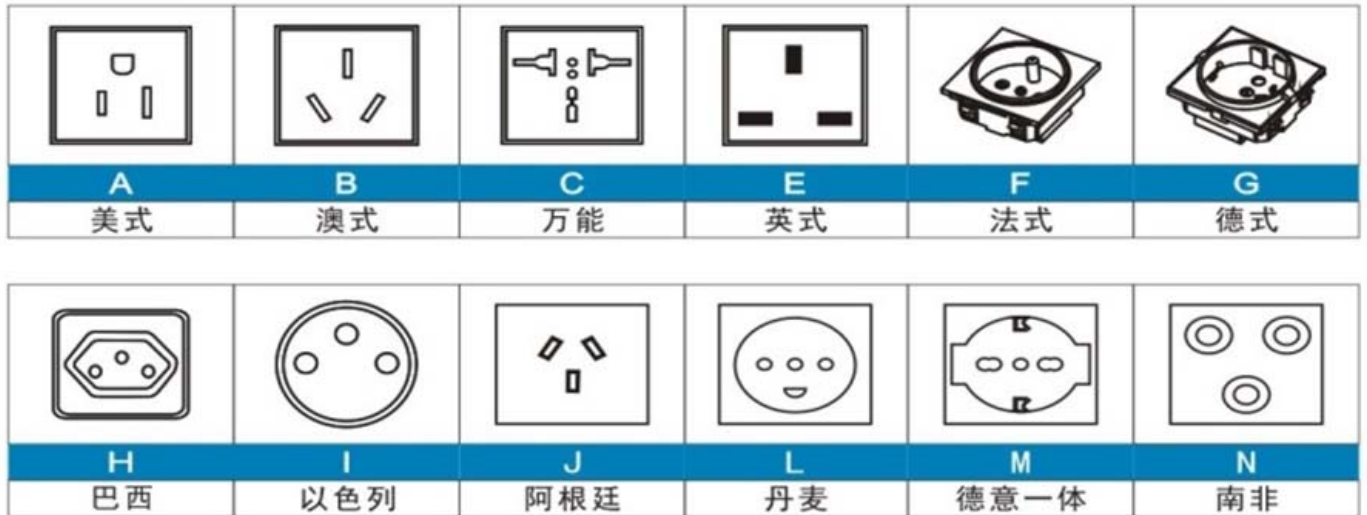

## 安装尺寸

